



DISPENSERS



PUMPS



METERS



METERED NOZZLES



NOZZLES

3D FILTER

FEATURES

- 3-STEP FILTRATION
- HIGH-RESISTANCE CASE
- REMOVABLE CARTRIDGE

The Piusi 3D FILTER is specifically designed to prevent the contamination of DEF during transferring operation. Thanks to the highly efficient (200 β) mechanical filtration, it allows an extended life of the catalyst.

PERFORMANCE

200 β

FILTERING CAPACITY

**UP TO
58 PSI**

OPERATING PRESSURE



3D FILTER



PACKAGING

PART #	WEIGHT			PACKAGING		
	A IN	B IN	C IN	WEIGHT LB	DIMENSION IN	FILTER HEAD PCS/BOX
FOO611D30	5.3"	4.2"	5.5"	1.3	7.8X4.7X5.5	1
FOO611D40	4.1"	2.7"	4.1"	0.4	6.5X5.6X3.3	-



FILTRATION



FLUID
MONITORING



HOSE REELS



ACCESSORIES



AIR



ANTIFREEZE



DEF



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

FUNCTIONING



Typical condition of the filter after 7925 gallons dispensed. We recommend changing the filter cartridge once a year.



High efficiency (β 200) mechanical filtration of particulate by means of an incremental filter specifically developed for DEF.

IN THE BOX


- 3D FILTER
- INSTRUCTION MANUAL

DETAILS



3D FILTER CARTRIDGE

DIMENSIONS

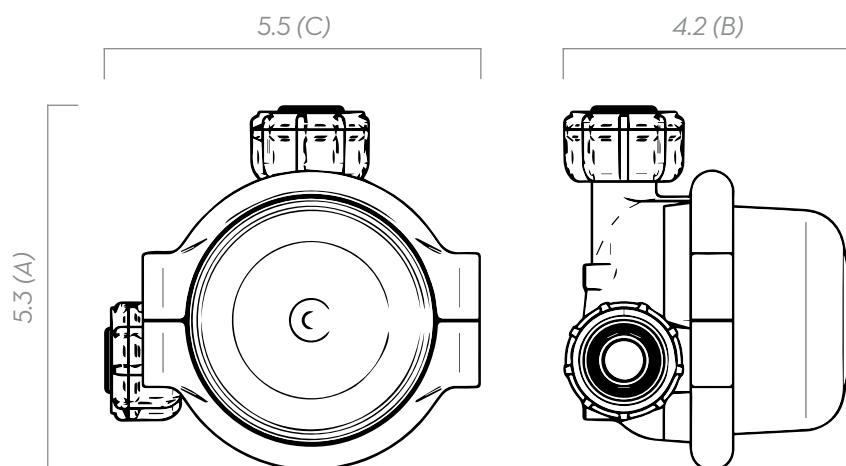

Dimensions expressed in inches

MATERIALS

- BODY: TECHNOPYMER
- CARTRIDGE: POLYPROPYLENE

TECHNICAL DATA

PART #	DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET/OUTLET	WATER ABSORBING	EFFICIENCY	MICRO	PRESSURE
			L/MIN	GPM			β	M	PSI
FOO611D30	PIUSI 3D FILTER FILTER + HOUSING		40	10.5	1"	-	200	70	58
FOO611D40	PIUSI 3D FILTER CARTRIDGE REPLACEMENT		-	-	-	-	-	-	-

3D FILTER