



LUBE KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES



FILTRATION

GPV 2.0

FEATURES

- **READY TO USE**
- **COMPATIBLE WITH ALL FLUIDS (UNIVERSAL VERSION ONLY)**
- **QUICK RETROFIT INSTALLATION**
- **DEF AND DIESEL VERSIONS NOW AVAILABLE**

PERFORMANCE

LAN/WI-FI

CONNECTION SYSTEM

± 0.5%

ACCURACY

up to

7.8 GPM

FLOW RATE

The GPV 2.0 is the MCO2.0 version of the well known Piusi GPV. It includes a built-in solenoid valve and an oval gear meter, everything in a single device. It is available in several versions based on the fluid you need to control.



ENHANCED ERGONOMICS

Designed and built to operate constantly, with no surprises.

WI-FI CONNECTION

GPV 2.0 can be fully controlled remotely.




PACKAGING

PART #	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO446010	3	6.6	180X180X170	7X7X6.7	-	1
FOO446000	3	6.6	180X180X170	7X7X6.7	-	1
FOO446060	5.7	12.6	350X180X260	13.8X7X10.2	-	1
FOO446030	3	6.6	180X180X170	7X7X6.7	-	1
FOO446070	4.3	9.5	350X180X260	13.8X7X10.2	-	1
FOO446080	4.3	9.5	350X180X260	13.8X7X10.2	-	1
FOO446050	3	6.6	180X180X170	7X7X6.7	-	1

CHARTS

GPV 2.0

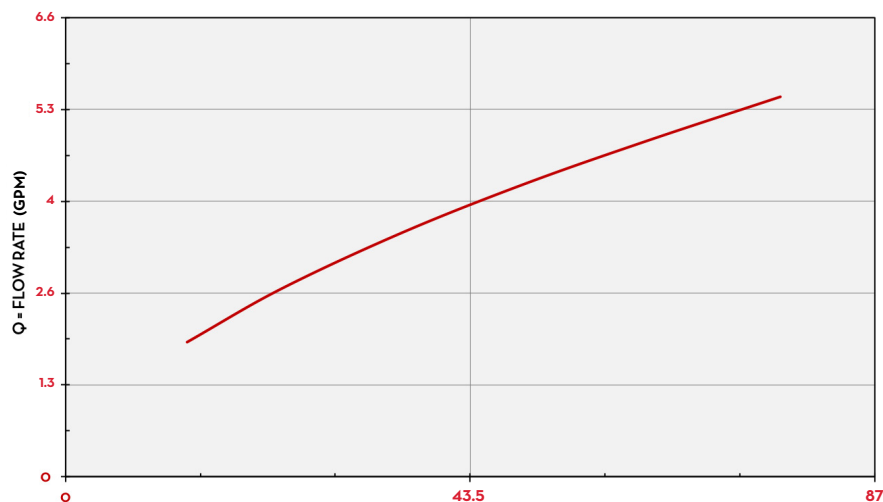

TYPE OF FLUID OIL SAE 10W40

TEMPERATURE 73°F

P = TOTAL PRESSURE (PSI)

IN THE BOX

- GPV 2.0 UNIT
- INSTRUCTION MANUAL

MATERIALS

- GEARS: TECHNOPOLYMER
- BODY: ALUMINUM
- TOPPING: NBR
- VALVE: NBR, NICKEL PLATED STEEL, BRASS



TECHNICAL DATA

PART #	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE		CONNECTION
			L/MIN	GPM	AC V/Hz	POWER WATT	
FOO446010	GPV 2.0-BI VALVE-WIFI DOUBLE SOLENOID	O	30	7.9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446000	GPV 2.0 SINGLE VALVE	O	30	7.9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446060	GPV 2.0 SINGLE VALVE REMOTE	O	30	7.9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446030	GPV 2.0 - WIFI SINGLE SOLENOID VALVE WWF	W	30	7.9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446070	GPV2.0 - SINGLE VALVE DEF	D	5 - 120	1.3 - 1.6	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446080	GPV2.0 - SINGLE VALVE DIESEL	D	10 - 100	1.3 - 31.6	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446050	UNIVERSAL VALVE AND PULSER CONTROL	ANY	-	-	100-240 V/ 50-60 HZ	25	WI-FI / LAN

SHALL BE COMPLETED WITH A SUITABLE VALVE AND PULSER

GPV 2.0