



LUBE KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES



FILTRATION

NEXT/2

FEATURES

- ADJUSTABLE UNIT OF MEASUREMENT
- EASY BATTERY ACCESS
- AAA STANDARD BATTERY
- SHOCK-ABSORBING PROTECTION
- ON-SITE CALIBRATION

The Piusi NEXT/2 meter is an oval gear meter suitable for the delivery of low, medium and high viscosity oils. Its particular size allows the meter to measure at high flow rates.

PERFORMANCE

up to
15.8 GPM
from 1.58 GPM

FLOW RATE

± 0.5 %

ACCURACY

0.2%

REPEATABILITY

max
994 PSI

PRESSURE



NEXT/2



PACKAGING

PART #	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO486150	0.6	1.3	115X160X135	4.5X6.3X5.3	-	1

FLUID
MONITORING

HOSE REELS

PIUSI
®

AIR



ANTIFREEZE



DEF



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



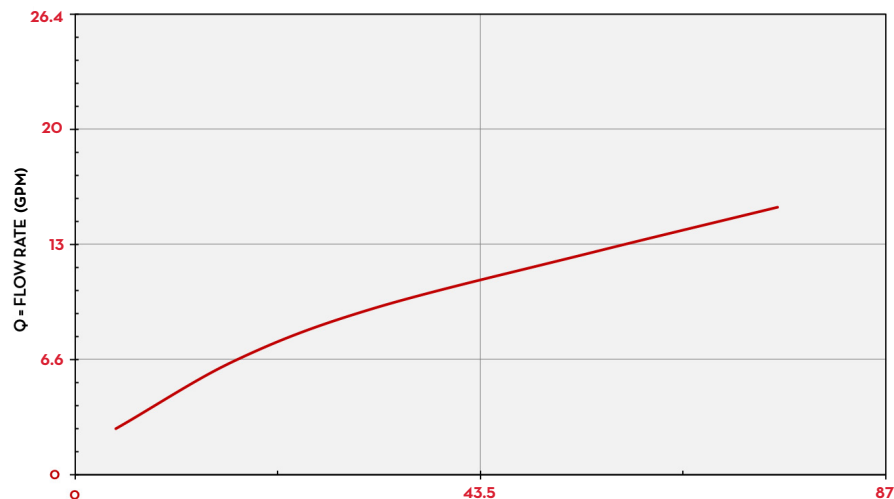
OIL



WATER



WINDSCREEN

CHARTS**NEXT/2**

TYPE OF FLUID OIL SAE 10W40
TEMPERATURE 73°F

IN THE BOX

- NEXT/2 METER
- INSTRUCTION MANUAL

DETAILS

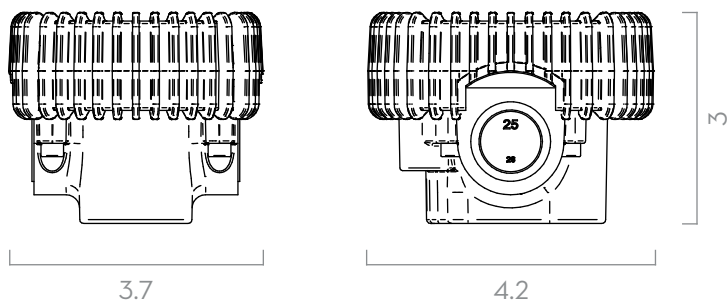
RESET BUTTON



OVAL GEAR



2 AAA BATTERIES INCLUDED

DIMENSIONS

Measures expressed in inches

MATERIALS

- BODY: ALUMINUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

PART #	DESCRIPTION	FLUIDS TYPE	FLOW RATE		WORKING PRESSURE		BATTERY INCLUDED	INLET	OUTLET
			L/MIN	GPM	BAR	PSI			
FOO486150	NEXT/2 METER		6 - 60	1.58 - 15.8	70	994	YES	3/4" BSP	3/4" BSP

NEXT/2