



DISPENSERS



FUEL KITS



PUMPS



METERS



NOZZLES



FILTRATION

UL-NOZZLES

FEATURES

- AUTOMATIC
- READY TO USE
- STURDY DESIGN

In order to meet the strict standards of UL requirements, PIUSI specially developed these versions of the A60, A120, and A140 nozzles to be used with the UL-Certified EX-Pump kits for the transfer of gasoline and diesel fuels.



PERFORMANCE

UP TO
37 GPM

FLOW RATE

1" NPT

INLET

3/4"
SPOUT OD Ø

UL-NOZZLE

1"

SPOUT OD Ø

A120



A60-UL



A120-UL



A140-UL



PACKAGING

PART #	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
F18635000	1.25	2.76	36OX36OX28O	14X14X11	1	-	-
F21088000	1.93	4.25	36OX36OX28O	14X14X11	1	-	-
F22435000	1.93	4.25	36OX36OX28O	14X14X11	1	-	-



AIR



ANTIFREEZE



DEF



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

A60 - A120

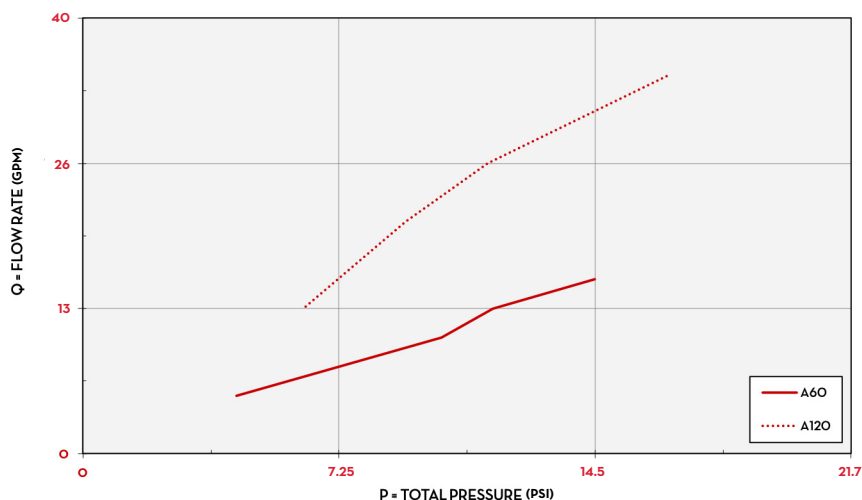

TYPE OF FLUID DIESEL
TEMPERATURE 68-77-50 °F


IN THE BOX

- A60-UL/A120-UL/A140-UL NOZZLE
- INSTRUCTION MANUAL

DETAILS



DIMENSIONS

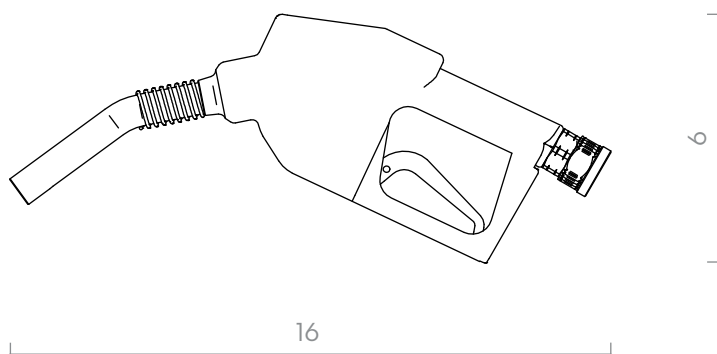

Dimensions expressed in inches

MATERIALS

- BODY: ALUMINUM
- SEAL: VITON

TECHNICAL DATA

PART #	DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET		SPOUT
			L/MIN	GPM	WITHOUT SWIVEL NPT	WITH SWIVEL NPT	EXT. Ø IN
F18635000	A60 AUTO NOZZLE 3/4"NPT IN. 3/4"SPOUT UL	D G	60	16	F 3/4"	F 1"	3/4"
F21088000	A120 AUTO FUEL NOZZLE HIGH FLOW 1" (UL)	D G	120	32	F 1"	F 1"	1"
F22435000	A140-UL AUTOMATIC NOZZLE	D G	140	37	F 1"	-	1"

A60-UL/A120-UL/A140-UL