



DISPENSERS



FUEL KITS



PUMPS



METERS



NOZZLE



FILTRATION

SSM1.5

FEATURES

- **CERTIFIED ETL 1238**
- **LOCKABLE FRONT PANEL**
- **SUITABLE FOR ANY PUMP**
- **PULSE METER INPUT**
- **60 OR 120 USERS BASED ON SOFTWARE**

Self Service 1.5 Management Software, for use with the MC Box 1.5 management system, is available in 2 versions which can control up to 60 or 120 users respectively.

PERFORMANCE

UP TO
120

USERS

AC
VOLTAGE
POWER


UP TO
650

TRANSACTION MEMORY

SOFTWARE ACTIVATION MODE



**USB
HARDWARE KEY**
without internet
connection

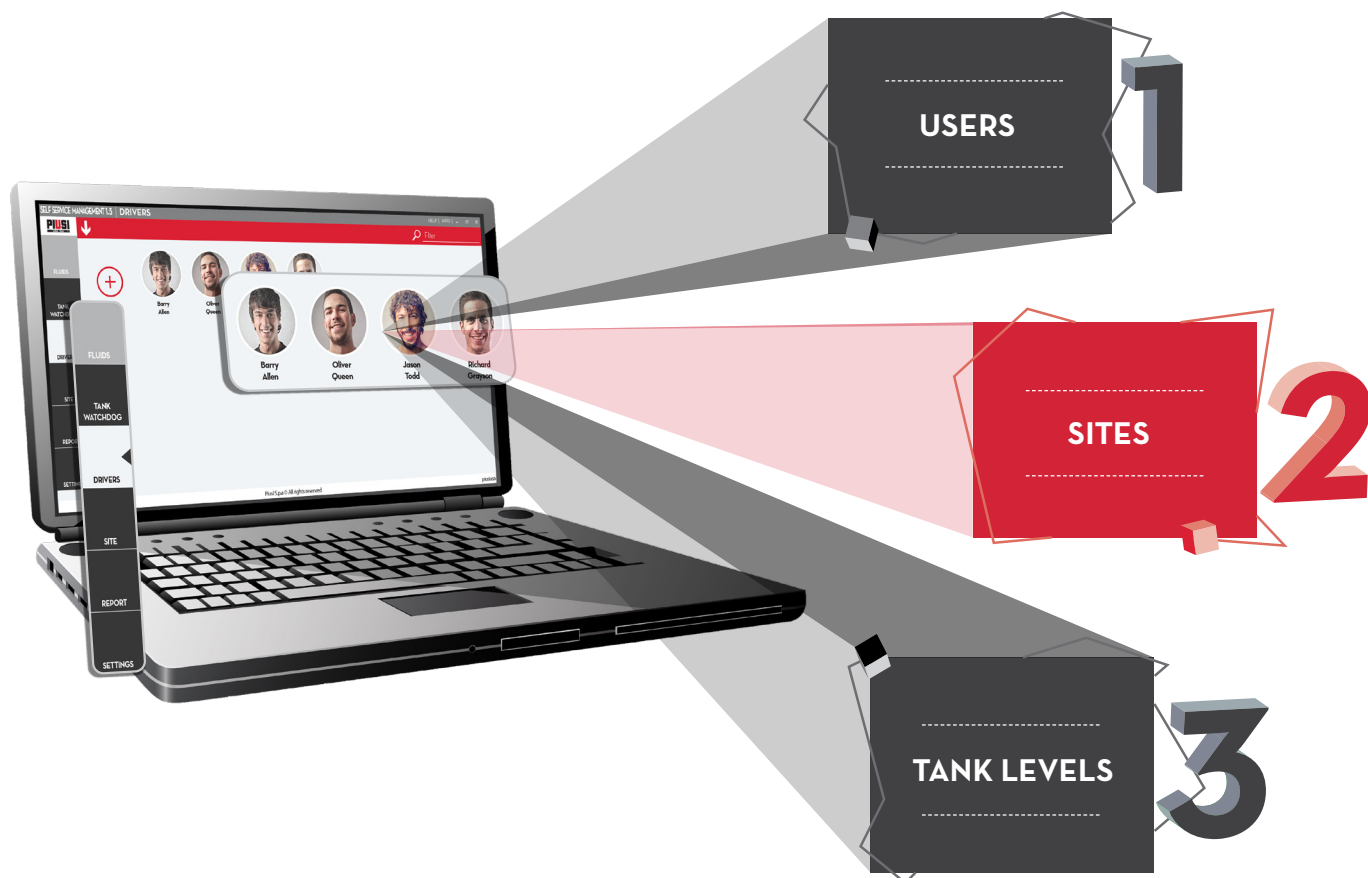



FLUID MONITORING

PIUSI®



AIR



ANTIFREEZE



DEF



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

TANK MONITORING

check the available amount of fuel and fluids in your tanks

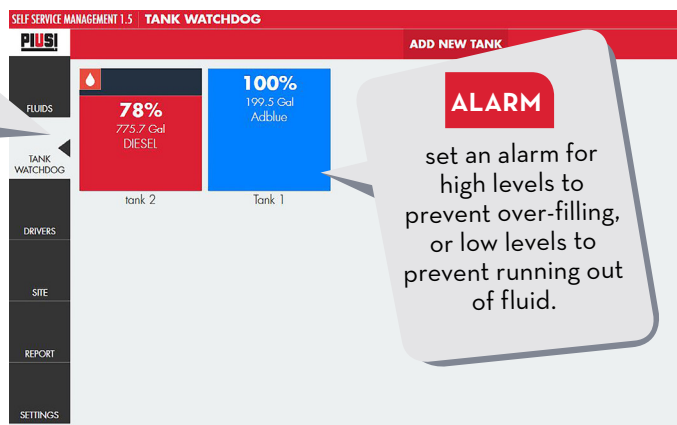

The system min. requirements are:

- Monitor resolution 1280x700
- CPU: Intel® Pentium® 4 or AMD Athlon® 64 processor (2 GHz or higher)
- RAM: 2 GB
- Free space on Hard Disk: 20 GB
- Operating system: Windows VISTA SP2, Windows Server 2008 R2 SP1, Windows 7 SP1, Windows 8, Windows 8.1, Windows Server 2012, Windows Server 2012 R2, Windows 10
- Database: Microsoft SQL 2012 R2 SP2 Express (included in the installation)

USERS

manage your users and monitor their fluid consumption



SITE

manage specific MC Boxes by site and monitor their use

TECHNICAL DATA

PART #	DESCRIPTION	USERS & HARDWARE
FO0772400	SSM 1.5 STANDARD SOFTWARE 60 USER 2 BOX	60 / 2 MC BOXES
FO0772420	SSM 1.5 PROFESSIONAL SW 120 USER 4 BOX	120 / 4 MC BOXES

*COMPLETE 1.5 MANAGEMENT SYSTEM REQUIRES: MC BOX 1.5, SELF SERVICE 1.5 SOFTWARE (STANDARD OR PROFESSIONAL), GRAY MANAGER KEY (F20552000), AND KEY READER (F12262010).

SSM1.5

SOFTWARE

107